Centerville City Traffic Improvement Plans

And Traffic Improvements Since 1993

Presentation Intention

- Illustrate how the city in cooperation with UDOT and various developers have strived to keep up with and plan for growing population and development

1. Far West End of Parrish Lane

2006

2011 - Legacy On/Off Ramps Added, Built Road Infrastructure

2. Parrish & 1250 West Intersection

2006

2011 - Widened
Added Turn Lanes

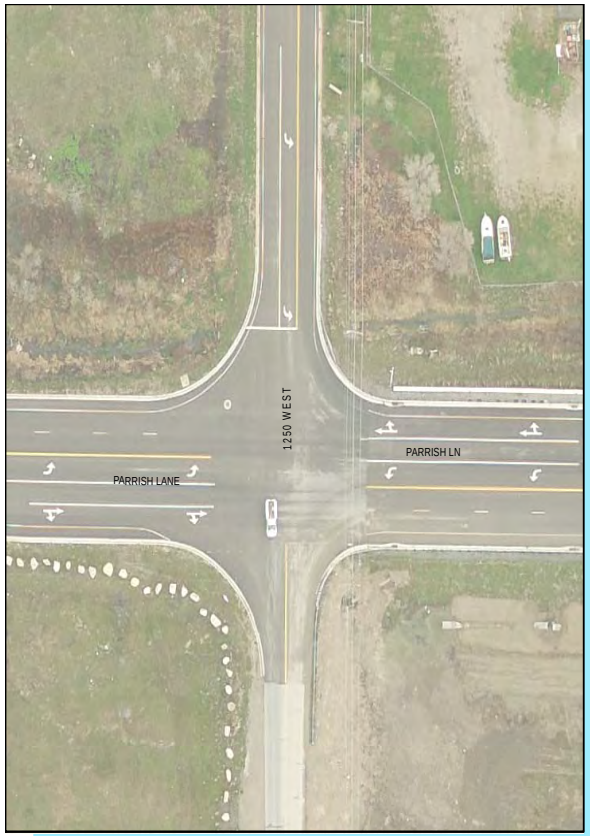

Future
Traffic Signals will be installed once warranted by UDOT

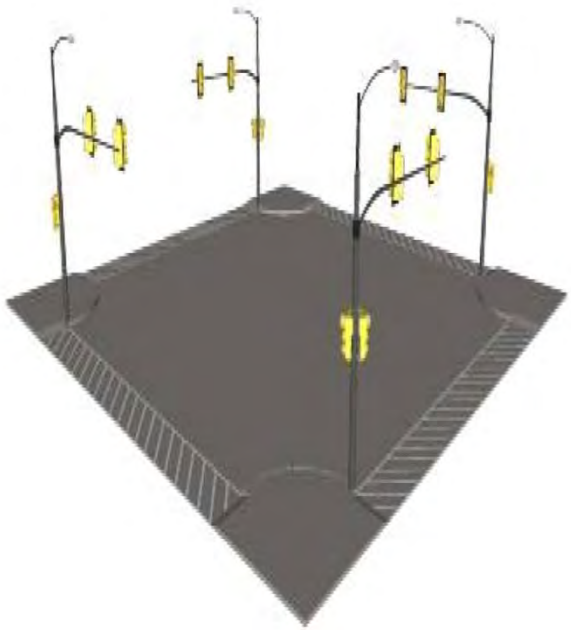

3. Legacy Crossing Blvd & 1250 W

2011

2012
Roundabout And Road For Apts/Theater Built

4. Parrish Lane, West Of Freeway

2008

2009 - Widened To Make 4 Lanes

5. I-15 On/Off Ramp & Parrish Ln

1998

2006 - NB Off Ramp
Double Turn Lane
Added &Traffic Lights Added

2008 - Bridge Widened
For Additional Lanes

2008 - NB Off Ramp Radius Improved
(Separate Project From Bridge Widening)

1. 2009 - SB Off Ramp Added Dedicated Left Turn EB Onto Parrish
2. Additional Right Turn/Straight Lane Added To SB Off Ramp

2009 -Additional EB Lane Added On Bridge (Removed Island Up To Market Place)

2012 - Additional Lane Added For NB Off Ramp ON I-15

Future

1. A Single Point Urban Interchange (SPUI) Will Be Added. (Similar to 600 N Off I-15 In Salt Lake.)
2. Dedicated WB Right Turn Lane To Be Added For NB On Ramp
3. Add Pedestrian Overpass Walkway

6. Between Market Place Dr & Frontage Rd on Parrish Lane

1993

1998 - Market Place Business Access Added

Future

1. Double NB Left Turn Lane To Be Added For Traffic Turning West Off Market Place Drive Onto Parrish Lane
2. Double EB Left Turn Lane To Be Added For Traffic Turning North Off Parrish Lane Onto Market Place Drive

7. Parrish Lane & 400 West

1993

2011 - All 4 Corners Widened

400 West Widened/Built Out

Future

Double Turn Lanes Will Be Added To NB Traffic Turning West Onto Parrish Lane

8. Market Place Drive, North of Target

2011

Future

Traffic Signal Will Be Added. (This will be a city funded project)

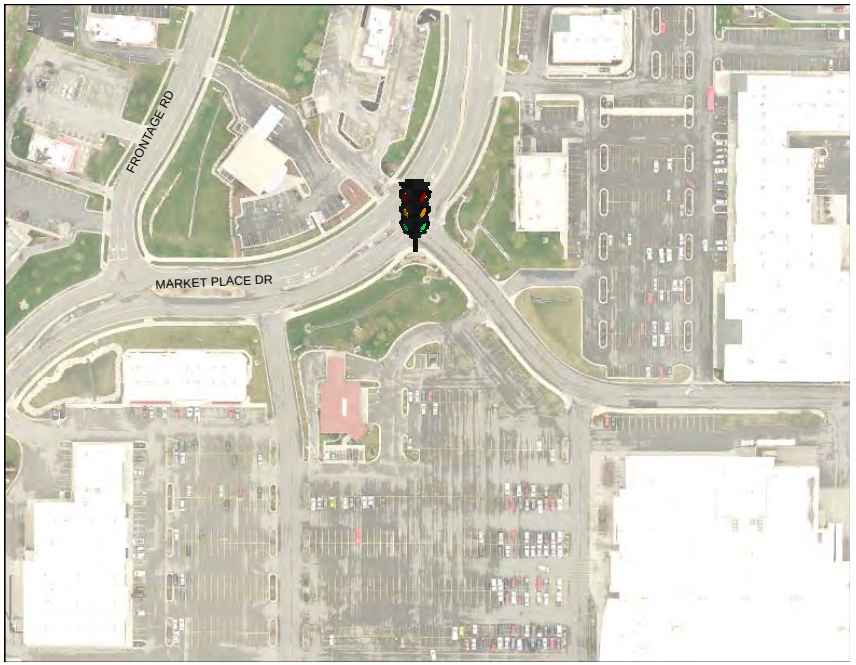

9. Main St & Pages Lane

1998

2004 - Widened Road, Added SB Right Turn Lanes On To Parrish

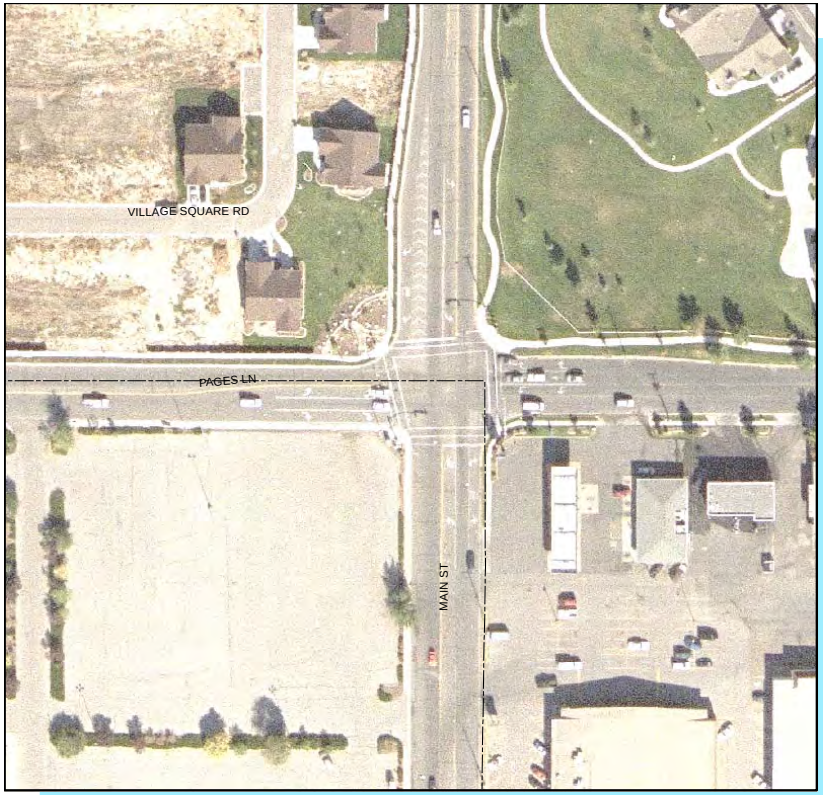

10. Main Street & Parrish Lane

2011

Future

Double Turn Lanes Will Be Added For NB Traffic Turning West Onto Parrish Lane.
Left/Straight Lane To Be Added For EB Traffic Turning North Onto Main St.
(State Warrant Met & Is Funded)

11. Chase Lane & Main Street

1998

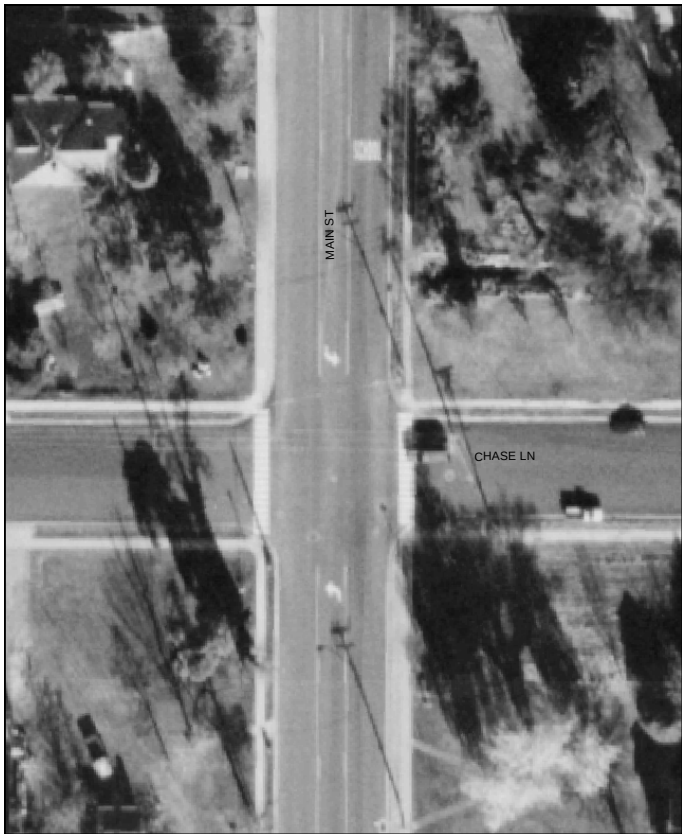

2001 - Traffic Light Installed

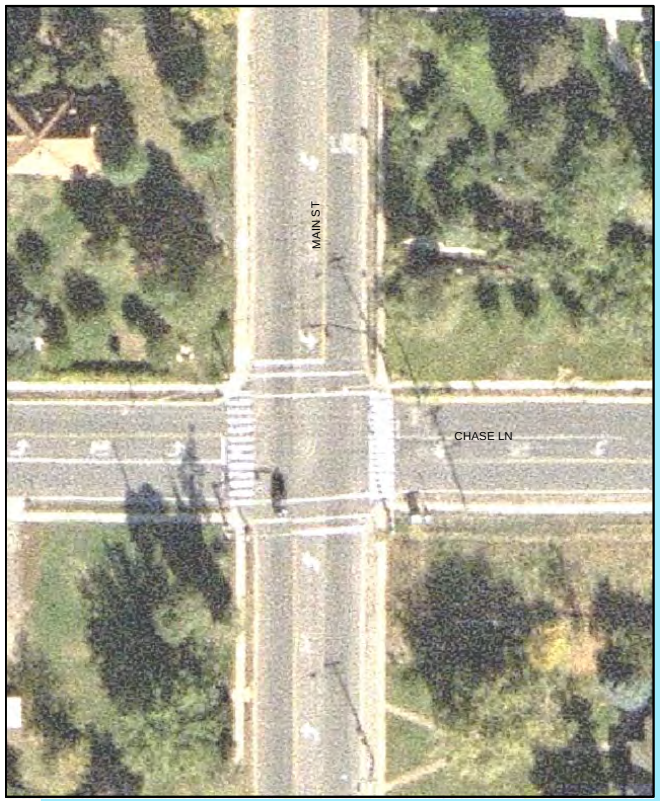

12. 1250 West & 1275 North

2006

2009

Legacy Bridge/1275 NORTH Built

13. & 14. North of 1275 North & West of Legacy Highway

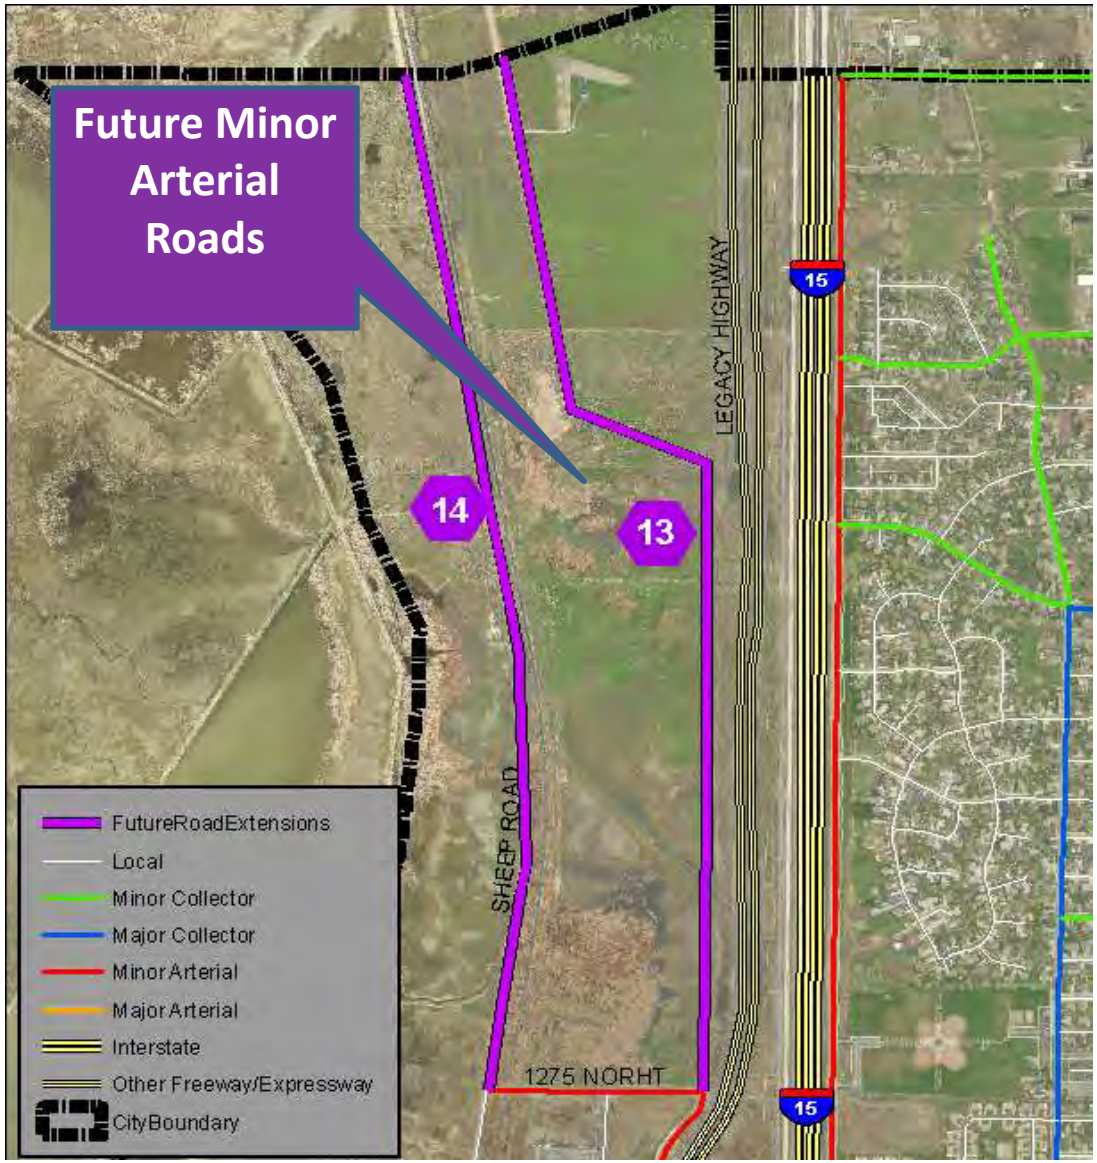

Other Traffic Improvements Prior To 1993

400 West & Porter Lane

Partial ROW Condemnation Allowed
400 West To Be Widened

Pages Lane & 400 East

Traffic Signal Installed Circa 1992

Cooperation Is Key

- Centerville's past and present traffic conditions have been improved due to efforts made by the City Council's and City Staff's negotiations with developers and UDOT.
- The future of Centerville's traffic conditions depend on the same level of cooperation that the city has historically engaged in.
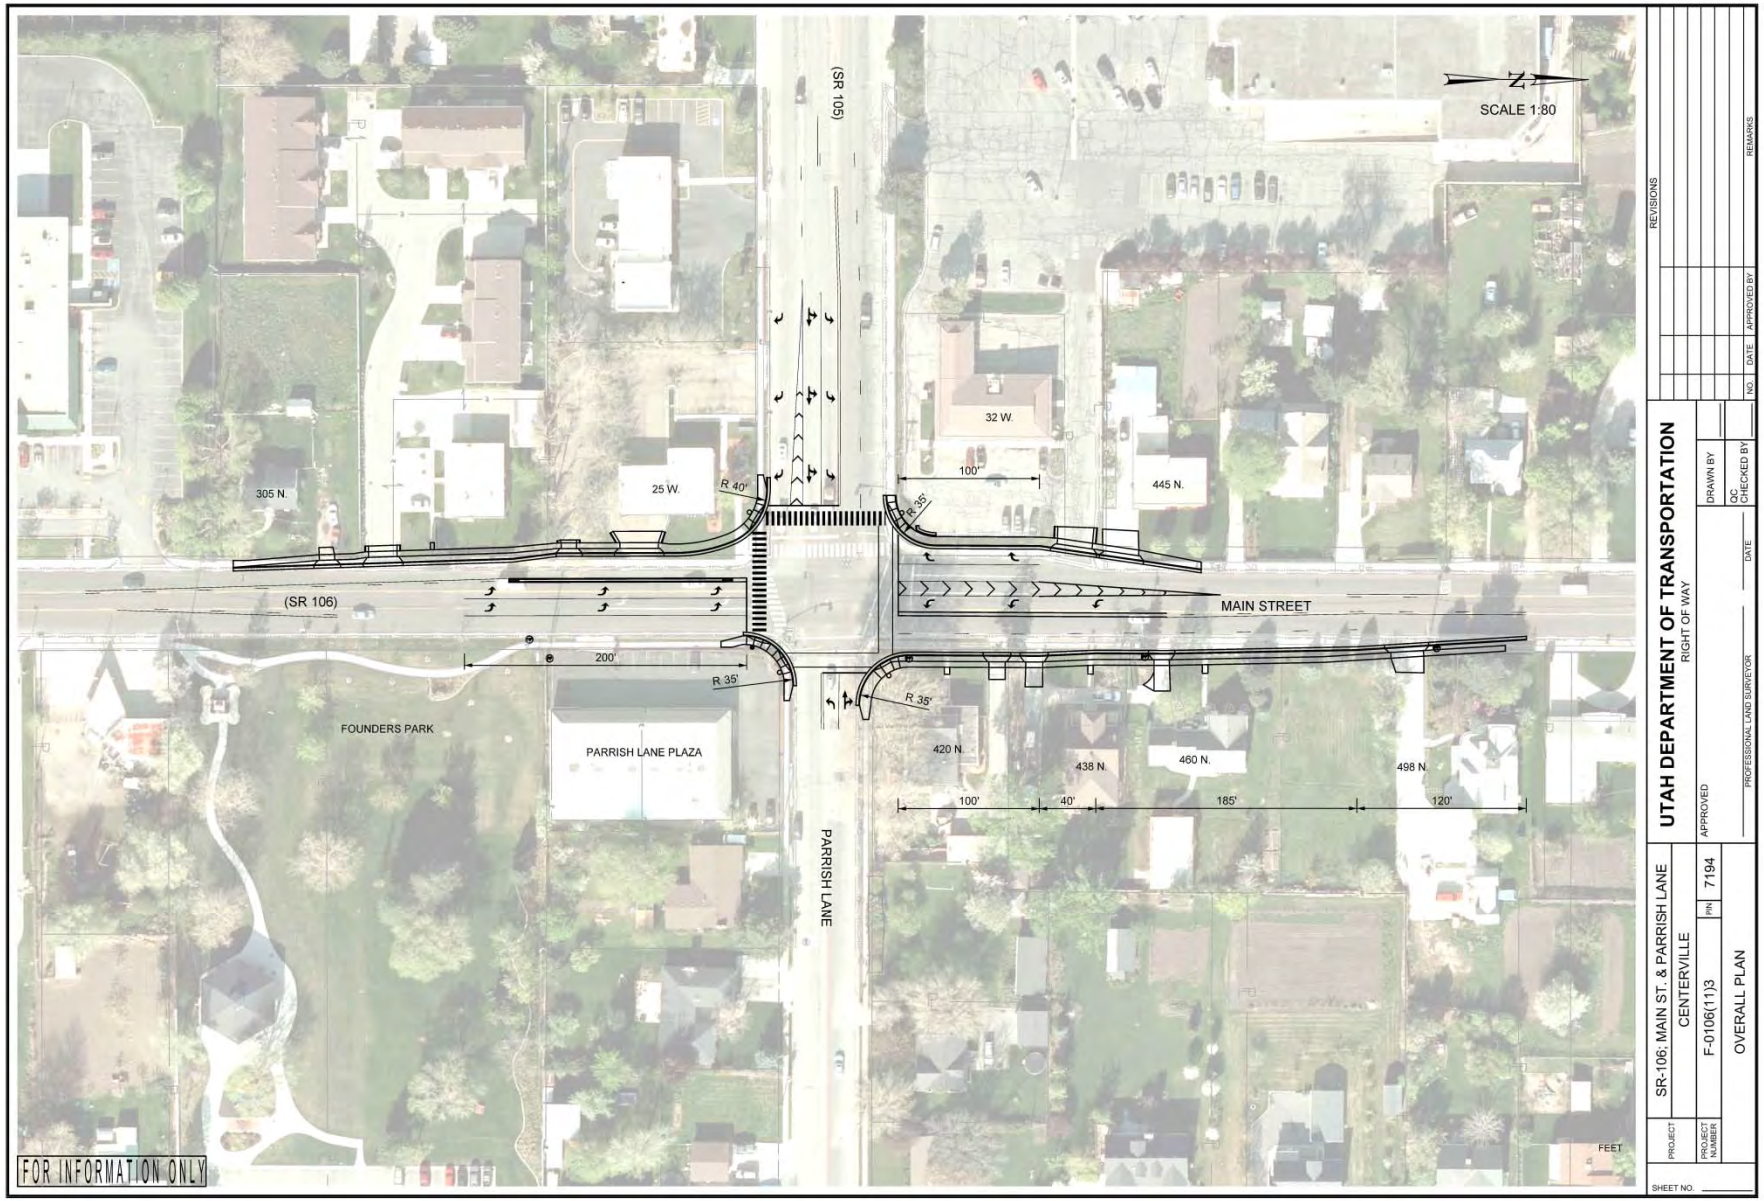
Parrish & Main Intersection